

Photonic Crystal Fibre (PCF)



Photonic Crystal Fibre, also known as microstructure fibre or holey fibre, normally consists of a regular pattern of air holes or doped materials inside pure silica background along the transverse direction. According to the mechanism of light guided in fibre, PCF is classified as TIR and PBG. Stacking and drawing technique are used for the preparation of our PCFs to realize special characteristics such as endless single mode, extremely large mode area, wave-guide in hollow core, high nonlinear effects and birefringence etc.

YOFC has developed a series of PCFs for all kinds of applications based on our synthetic material, PCVD process, stackingdrawing technique and theoretical simulation.

Characteristics

YOFC PCF has following characteristics


- Low loss
- Long delivery length
- Fine microstructure, excellent characteristics performance of specific fibre type
- Single material composition, namely high purity SiO₂ (except all solid photonic band gap fibre)

Application







- Supercontinuum sources
- Optical fibre laser and amplifier
- High power transmission
- Optical fibre grating and sensors
- All optical signal processing

Standard Products

- Endless single-mode PCF
- Polarization maintaining PCF
- High nonlinearity PCF
- All solid PBG
- Dual core fibre

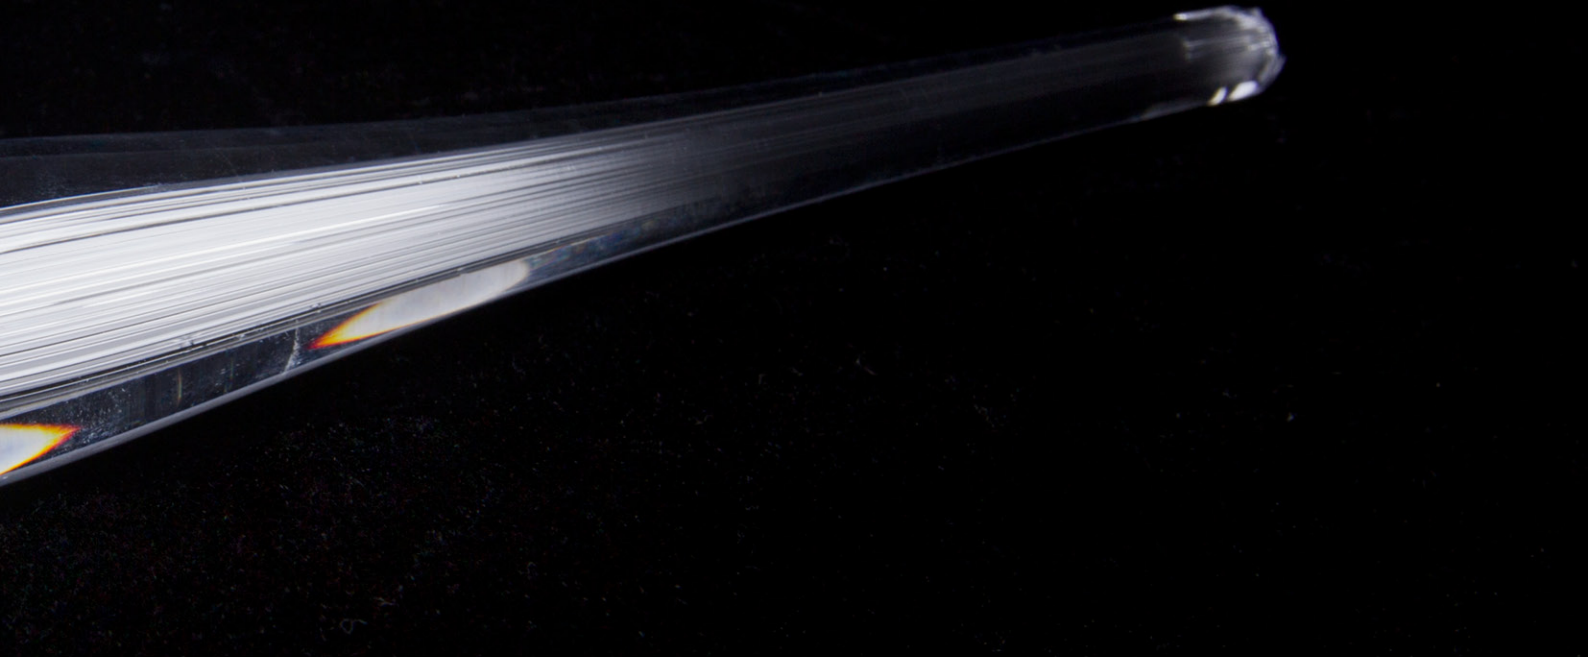

Specifications

| Main Classes | Subclasses | Attributes | Fibre Structure | Application Examples |
|---------------------------------|----------------------------------|--|--|--|
| Total internal reflection (TIR) | Endlessly single-mode fibre | Pure silica core; Attenuation can be as low as 1 dB/km |  | Wide single-mode transmission Energy delivery |
| | High Nonlinearity Fibre | 950-1100nm ZDW |  | Supercontinuum generation by 1μm pulse laser or CW laser |
| | | 700-900nm ZDW |  | Supercontinuum generation by 0.8μm fs pulse laser Nonlinearity optics Nonlinearity fibre laser |
| | Multi-core fibre | Dual core |  | Sensor, Directional coupling components |
| | PM fibre | Excellent radiation resistance, temperature insensitive, low macro-bending induced attenuation |  | Gyro; interferometer |
| Photonic bandgap (PBG) | All-solid photonic Bandgap fibre | Tailored bandgap spectrum |  | Filtering Special rare earth doped fibre Special dispersion and operating wavelength fibre |

www.yofc.com



This datasheet can only be a reference, but not a supplement to the contract. Please contact our sales people for more detailed information